

Altra-Air Sailfin

Gearless Air Movement.

Altra-Air Sailfin HVLS Ceiling Fans

Since 2003, we've continually searched, tested and modified airfoils to maximize their efficiency – solely for the purpose of moving large volumes of air at low speeds. Here's what we've done:



Gearless
Operation



Increased
Air Speeds



Reduced
Operating Costs



Decreased
Noise



High
Visibility Light



3780 Quail Rd. NE
Sauk Rapids, MN
56379
1-320-253-7068
1-800-669-4038




Performance & Benefits

(Tested to AMCA Standards)

- 6MPH Breeze
- Maximum 5.7A Draw
- 264 CFM/Watt
- Minimal 2.5" Blade Flex
- 53 RPM at Full Speed
- Up to 23° Angle of Attack
- Less Torque

The Evolution to Sailfin

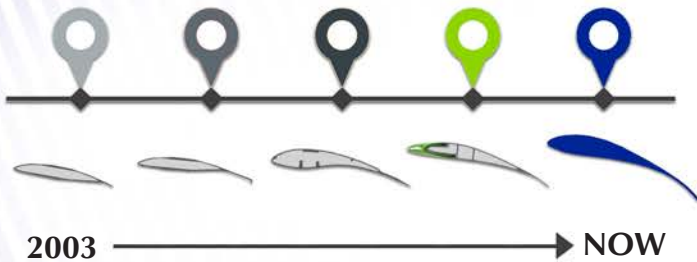

The Ultra-Air Sailfin variable pitch, modulated trailing-edge airfoil removes the inefficiencies created by differentiating rotational HVLS Fan speeds.

Simply put - A faster tip speed requires less surface area and less angle of attack to produce airflow. While a slower hub speed requires more surface area and more angle of attack to produce airflow. The evenly spread deflection creates less disruption in the trailing air stream, producing cleaner air for the following airfoil, less blade flex in the alternating blade assembly and lowers unwanted (and expensive) operating load.

All this adds up to greater air speed velocities, with less noise created and less money spent operating. Not to mention one sleek looking design.

